


GAS DEPARTMENT

January 18, 2022

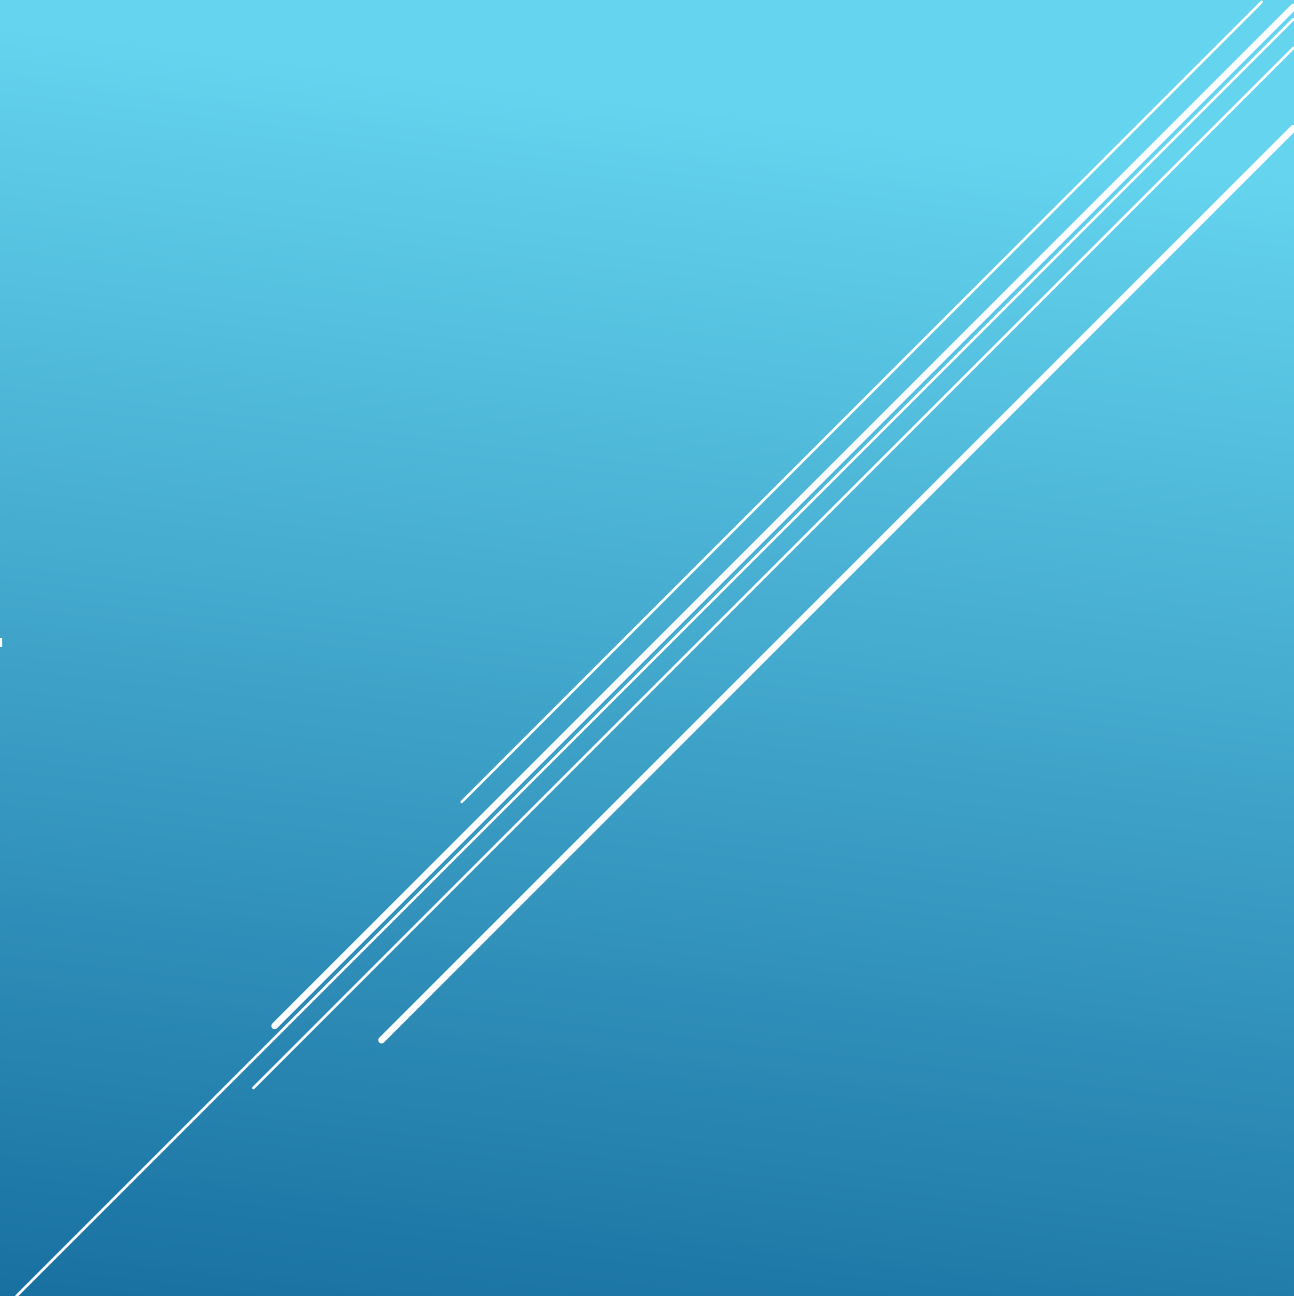

STEEL – POLY REPLACEMENT

Completed required steel line footage replacement for both
Alpine and Fort Davis

Alpine – 1,786 Feet replaced

For Davis – 1,580 Feet replaced

Initiating process for 2022

DIMP Risk Model updated to include prior year totals

Risk Model provides required footage for current year

LEAK SURVEY

Currently working on 10 Grade 3 leaks


Leaks are required to be repaired in the next 3 years

Estimate completion in the next 6 to 12 months

Leak Survey is completed annually

Orange – Poly

Blue - Steel

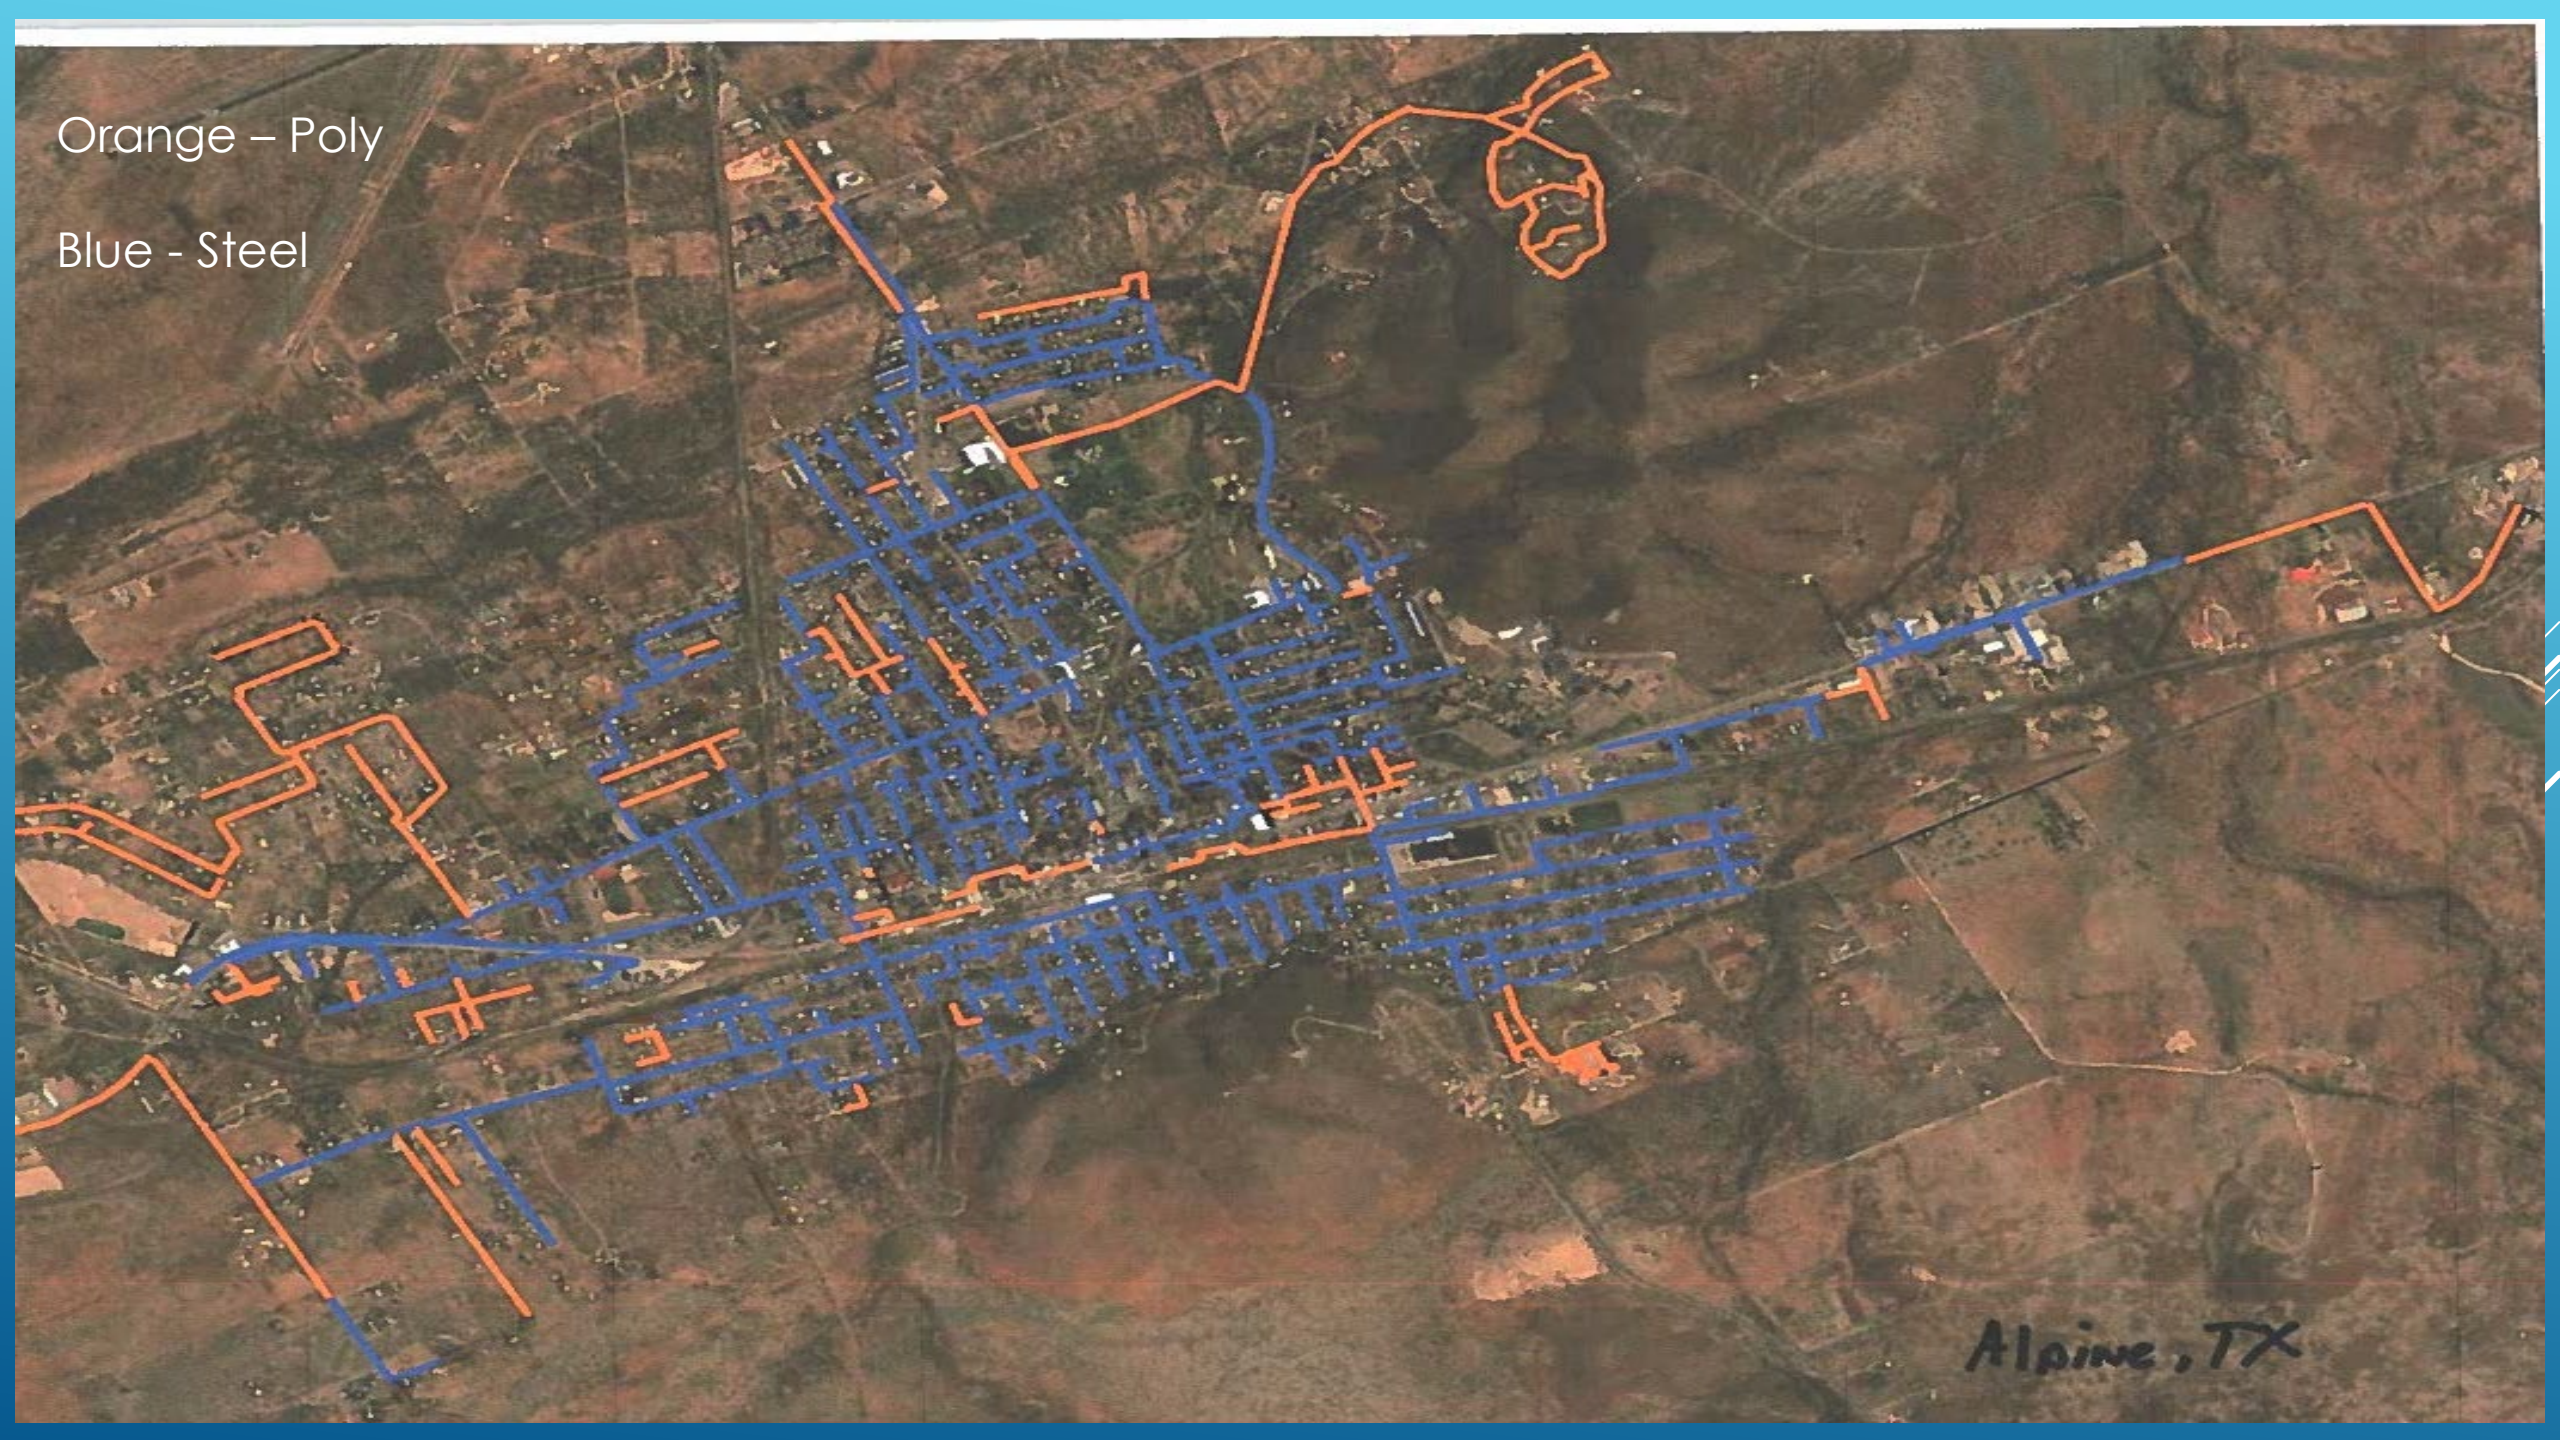

Alpine, TX



14

Orange – Poly

Blue - Steel

1 - 4

Fort Davis, Texas